INSTALLATION INSTRUCTIONS

For Model 1972-138

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE BACKPLATE(Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the crossbar to the junction box using two Junction Box Screws. The side of the crossbar marked "GND" must face out.
4. Thread the nipple part way into the center hole of the crossbar.

CONNECTING THE WIRES (Fig. 2)

1. At the point, connect the electrical wires as follow, Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connects fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar using the green screw provided.

MOUNTING FIXTURE AND SHADE

1. After the wires are connected tuck them carefully inside the junction box as you place the back plate over the nipple. Secure the back plate against the wall using Knurled Cap.
2. Install glass shade by referring to figures 1.
3. Install light bulbs in accordance with fixtures specification, **DO NOT EXCEED MAXIMUM WATTAGE RATING!**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

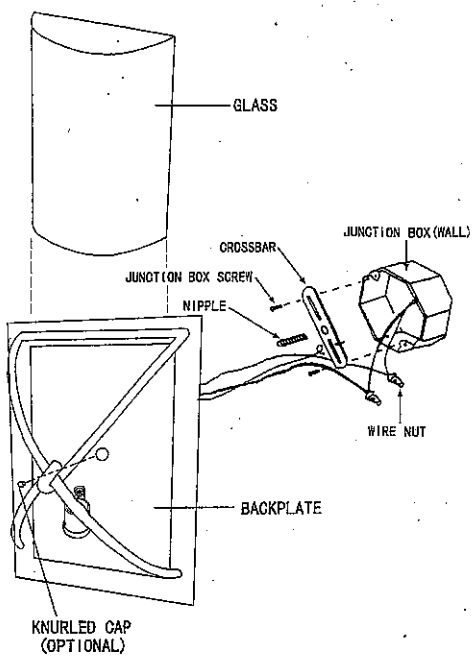

Fig. 2

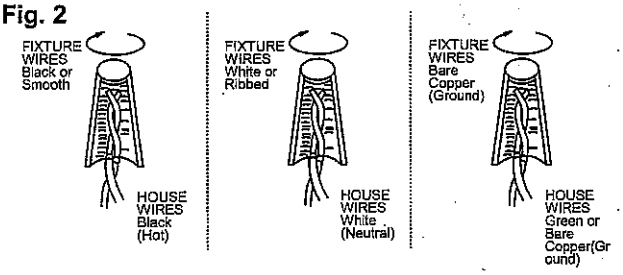
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green or Bare Copper(Ground)

MIN 90°C SUPPLY CONDUCTORS

Listed

american lighting association